

Winkelstück mit konischem Außen- und zylindrischem Innengewinde - A10



AG BSPT

R 1/8

IG BSPP

G 1/8

Betriebsdruck


0 bis 15 bar

Werkstoff

Messing und Messing
vernickelt

Beschreibung

| Artikelnummer | AG BSPT | IG BSPP |
|-----------------|---------|---------|
| A10 1818 | R 1/8 | G 1/8 |
| A10 1414 | R 1/4 | G 1/4 |
| A10 3838 | R 3/8 | G 3/8 |
| A10 1212 | R 1/2 | G 1/2 |
| A10 3434 | R 3/4 | G 3/4 |
| A10 0101 | R 1 | G 1 |

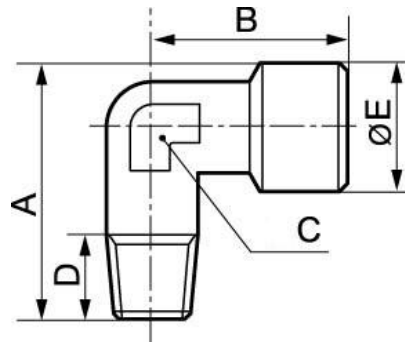

Dimensions

| Artikelnummer | A mm | B mm | C mm | D mm | E mm |
|-----------------|------|------|------|------|------|
| A10 1818 | 24.5 | 20.5 | 10 | 8 | 13.5 |
| A10 1414 | 32 | 26 | 13 | 12 | 17 |
| A10 3838 | 36.5 | 30 | 15 | 12 | 20.5 |
| A10 1212 | 44 | 36 | 20 | 16 | 25.5 |
| A10 3434 | 49 | 36.5 | 25 | 16 | 32 |
| A10 0101 | 58.5 | 45 | 30 | 16 | 39 |