

## Verlängerungsstück mit 2 Innengewinden - A6



IG

M5

IG BSPP

G 1/8

Betriebsdruck


0 bis 15 bar

Werkstoff

Messing und Messing  
vernickelt

### Beschreibung

Artikelnummer	IG	IG BSPP
<b>A6 M518</b>	M5	G 1/8
<b>A6 1814</b>	G 1/8	G 1/4
<b>A6 1838</b>	G 1/8	G 3/8
<b>A6 1438</b>	G 1/4	G 3/8
<b>A6 1412</b>	G 1/4	G 1/2
<b>A6 3812</b>	G 3/8	G 1/2

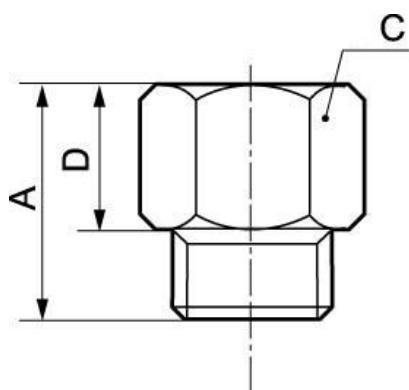

### Dimensions

Artikelnummer	A mm	C mm	D mm
<b>A6 M518</b>	13.5	14	10.5
<b>A6 1814</b>	21.5	17	15.5
<b>A6 1838</b>	23.5	22	15.5
<b>A6 1438</b>	25.5	22	16.5
<b>A6 1412</b>	28.5	24	19.5
<b>A6 3812</b>	29.5	24	18.5